
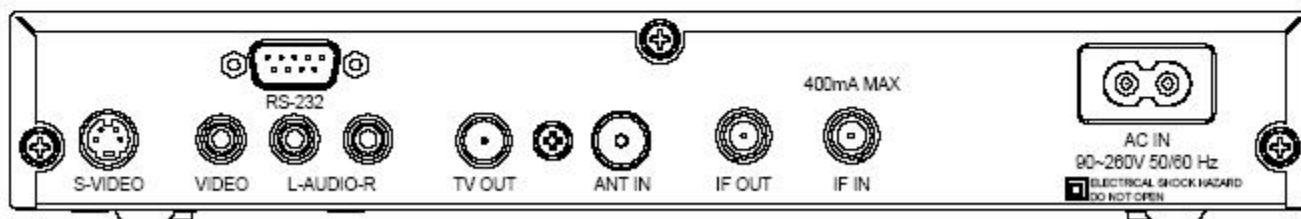


Specifications

ZDX-7000 Digital Satellite Receiver-Fully DVB-S Compliant

<ul style="list-style-type: none"> ● IF Input 	Frequency 950 ~ 2150 MHz Input Level -25 ~ -65 dBm Connector F-Female Demodulator QPSK Symbol Rate 2 ~ 45 MS/s	<ul style="list-style-type: none"> ● Conditional Access: 	IRDETO Embedded
<ul style="list-style-type: none"> ● Video Output 	Formats MP @ ML Aspect Ratio 4:3 / 16:9 Picture Resolution 720 x576 , 720 x480 Output System NTSC/PAL Connector RCA / S-Video Output Level 1Vpp±10% (Load 75ohm)	<ul style="list-style-type: none"> ● Front Panel 	Power switch IR Receiver Four digit 7-segment displayer 4 LED's
<ul style="list-style-type: none"> ● Audio Output 	Formats MPEG (Layer1&2) Sample Rate 32/44.1/48 KHz Mode Mono/Stereo/Dual Connector RCA Output Level 2Vrms±10% (Load> 10K ohm)	<ul style="list-style-type: none"> ● Rear Panel 	Tuner L-Band input L-Band Loop through 2* RCA Audio ports (L/R) 1* RCA Video port Mini Din S-Video PLL Re-modulator 9PIN Data Port AC Power IN
<ul style="list-style-type: none"> ● RF Modulator 	System PAL-I/B/D/G/K (NTSC) Channel Ch.21~69 (Ch.3~4) Return Loss 6 dB max.75 Ohms Audio Mono Connector IEC (F-type) By Pass Bandwidth 45~862MHz	<ul style="list-style-type: none"> ● Power Supply 	Input Voltage 90 ~ 260 VAC, 50 ~ 60 Hz
<ul style="list-style-type: none"> ● LNB Control 	Polarity Control 13/18 V DC (400mA max) Short Circuit Protection Band Switching 0/22 KHz DiSEqC 1.0 & 1.2	<ul style="list-style-type: none"> ● Dimension 	W xD xH (mm) 265*189*43mm Weight (g) TBD
		<ul style="list-style-type: none"> ● General Data 	Operating Temperature 5°C ~ 40°C Storage Temperature -40°C ~ 65°C
		<ul style="list-style-type: none"> ● Accessories 	1*Remote control 1*User Manual AV Cable with RCA Connector

Mechanical Drawing

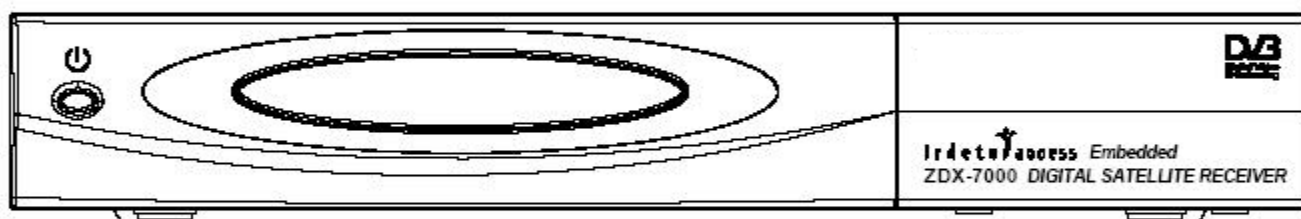

Specifications are subject to change without notice.

Revised